

Name: **PolySeal Mano**

Description: Manual sealing device for sealing all sorts of plastic containers

Equipment features

- sealing head heating block, swingable, anodized aluminium
- container centring by stop prisms
- heat protection shield
- POLYTRONIC temperature control unit

Technical data

electrical power supply	230 V, 50/60 Hz
sealing head heating block	100x100x25 mm
nominal current	5 A
power consumption	1 kW
sealing capacity	approx. 500 units/h
variable height adjustment	0-300 mm
temperature setting	100-300 °C
container size (height/outerØ/mouthØ)	max. 280/180/160 mm
sealing stroke, manual	30 mm
weight	24 kg
dimensions (WxLxH)	330x500x600 mm

Complies with Directive 2006/95/EC (Low Voltage Directive).

Your sealing system from one source!

Aluminium seals from BALLERSTAEDT - suitable for your application.
Please contact us.


The information contained here is purely informative and non-binding.

Nr. 42940-E, Version: 3 - Datum/Ersteller: 14.07.2020/SL

Last amendment: 22.01.2021/SL - Datum/Freigeber: 22.01.2021/HK



variable height adjustment

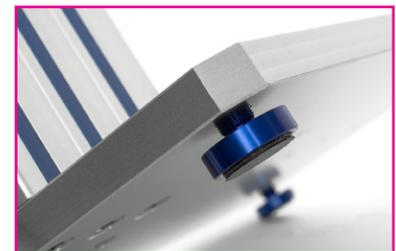

height-adjustable feet



sealing head heating block with heat protection shield

BALLERSTAEDT & CO. OHG

Hardbergstr. 11 • D-76437 Rastatt

www.ballerstaedt.de

Phone: +49 (0)7222/9515-0

E-Mail: sales@ballerstaedt.de